

Ultrasonic Residential Water Meter

FM-10

Introduction:-

As water resources are becoming scarce, the demand for water measurement is increasing. The ultrasonic water meters are newly developed according to the international water meter standard ISO-4064-1:2005. At the same time, it has a battery-powered super-long service life of large and small caliber ultrasonic water meter series.

The water meter adopts the latest domestic advanced ultrasonic time difference measurement technology developed by the company, which has the remarkable characteristics of high accuracy, ultra-low power consumption, wide range ratio, stability and reliability. Integration scheme is adopted in the structure. IP68 protection level can be achieved through good sealing, even if the instrument chamber water intake can ensure long-term reliable work.

Salient Features:

- Dual-channel ultrasonic probe is used to measure the pipeline. The measurement is accurate and reliable with no moving parts.
- Wide range ratio and low starting flow.
- With electronic lead sealing function.
- Positive and negative measurements can be made.
- Display abundant information, display 12-digit cumulative flow and 5-digit instantaneous flow in the same interface.
- With intelligent power-saving design, the instrument will turn on the power-saving mode in the static state of fluid or empty pipe.
- Storage of 24-month data.
- There are many kinds of communication interface modes: Rs485 interface, MBUS, MODBUS, infrared interface, support CJ-188 communication protocol and MODBUS protocol.
- Optional RS485, MBUS, NB-OT, LORAWAN
- Pulse output, easy to connect with other equipment.
- All IP68 protection grade design, all components are fully sealed protection, even if the water can work normally for a long time.
- It has the function of temperature measurement.
- According to different customer needs, There are a variety of unit systems, including m³, USG, ft³, L.
- Built-in lithium battery, more than 5 years battery life, optional external 24V power supply.



FEDREL®

WATER & FLOW METERS

DOC NO: VAV-C-1046; REV.NO.00.DATE 27-06-2020

100%
TEST

ISO 9001:2008

TÜVRheinland®
Precisely Right.

12
months
WARRANTY


www.fedrelflowmeters.com

Applications: This series of water meters solves the problems of traditional water meters such as easy blockage, idle running, small flow not measuring, countercurrent and so on. It can be widely used in urban water supply pipelines, District tables, water intake monitoring, farmland irrigation, as well as in a variety of industrial and agricultural sites.

Technique Specification:

- R(Q3/Q1): R400/R250
- Accuracy Class : Class 2
- Communication protocol: CJ-T188-2018, EN1434, MODBUS
- Standard Compliance: ISO 4064: 2005 (GB/T778-2007)
- Data interface: NB-IOT, LORA-WAN, Rs485, M-BUS, Pulse output, Infrared
- Water Temperature class: T30/50
- Power supply: Battery DC 3.6V lithium, 10years lifetime(optional)
- Protection Class: IP68
- Max. permissible Working Pressure: 1.6 MPa
- Mechanical Structure: Integration
- Working Environmental Requirement: Ambient temp.: -15°C~ + 70°C; Humidity: <100% (RH)
- EMC Class: E1
- Data Storage: 24 Month
- Static Consumption <10µA; Average working current <50µA

Typical Accuracy Curve Q3=2,5 M³/H

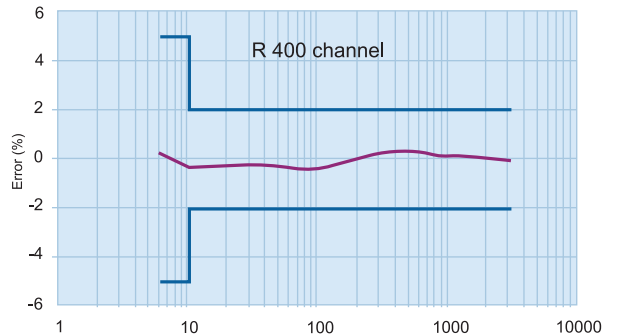

Actual Flow Performance Parameters:					
Diameter.mm	DN 15	DN 20	DN 25	DN 32	DN 40
R(Q3/Q1)			R250		
Accuracy Class			Class 2		
Permanent Flowrate Q3(M³/H)	2.5	4.0	6.3	10	16
Transitional Flowrate Q2(M³/H)	0.016	0.025	0.040	0.064	0.100
Minimum Flowrate Q1(M³/H)	0.010	0.016	0.025	0.040	0.064

WARRANTY

All meters are warranted against any manufacturing defect for a period of 12 months from date of supply, provided the meter has not been misused, damaged, installed for services it is not recommended or the seal has been tampered with. The company shall be liable to furnish part/ parts thereof or full water meter as the company may deem fit.

V.A. VALVES

(FLOW METERING DIVISION)

ISO 9001-2008 Certified

Regd. Office & Works: Udyog Nagar, Gadaipur, Jalandhar City -144 004

Phone: +91-181-2601540, 2601541 Fax: +91-181-2601741

E-mail : vavalves@vtm.utam.com, info@fedrelflowmeters.com

Website : www.fedrelflowmeters.com

Due to continuous development program, design and data in this leaflet are subject to change without prior notice.

Authorized Stockist